


Technical Datasheet

OS1 Mid-Range High-Resolution Imaging Lidar

Status: February 2021

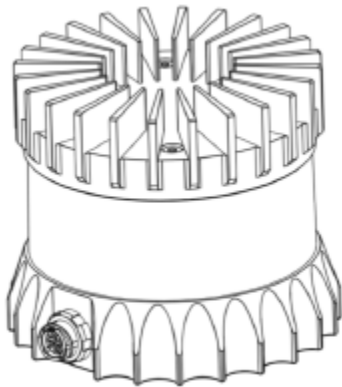

FIRMWARE VERSION: v2.0

HARDWARE VERSION: 840-102145-D (Rev D)

Summary

The OS1 offers an industry-leading combination of price, performance, reliability, size, weight, and power. It is designed for indoor/outdoor all-weather environments and long lifetime. As the smallest high performance lidar on the market, the OS1 can be directly integrated into vehicle facias, robots, drones, and fixed infrastructure.

Highlights

- Fixed resolution per frame
- Camera-grade near-infrared and intensity data
- Multi-sensor crosstalk immunity
- Fixed intrinsic calibration
- Open source drivers

Optical Performance

Range (80% Lambertian reflectivity, 2048 @ 10 Hz mode)	100 m @ >90% detection probability, 100 klx sunlight 120 m @ >50% detection probability, 100 klx sunlight
Range (10% Lambertian reflectivity, 2048 @ 10 Hz mode)	45 m @ >90% detection probability, 100 klx sunlight 55 m @ >50% detection probability, 100 klx sunlight

Minimum Range	0.3 m for point cloud data 0 m - 0.3 m blockage detection flag to indicate object within 0.3 m (v2.0 beta feature)
Range Accuracy	±3 cm for lambertian targets ±10 cm for retroreflectors
Precision (10% Lambertian reflectivity, 2048 @ 10 Hz mode, 1 standard deviation)	0.3 - 1 m: ± 0.7 cm 1 - 20 m: ± 1 cm 20 - 50 m ± 2 cm 50 m: ± 5 cm
Range Resolution	0.3 cm
Vertical Resolution	32, 64, or 128 channels
Horizontal Resolution	512, 1024, or 2048 (configurable)
Field of View	Vertical: 45° (+22.5° to -22.5°) Horizontal: 360°
Angular Sampling Accuracy	Vertical: ±0.01° / Horizontal: ±0.01°
False Positive Rate	1/10,000
Rotation Rate	10 or 20 Hz (configurable)
# of Returns	1 (strongest)

Laser

Laser Product Class	Class 1 eye-safe per IEC/EN 60825-1: 2014
Laser Wavelength	865 nm
Beam Diameter	9.5 mm
Exiting Sensor	
Beam Divergence	0.18° (FWHM)

Lidar Output

Connection	UDP over gigabit Ethernet
Points Per Second	655,360 (32 channel) 1,310,720 (64 channel) 2,621,440 (128 channel)
Data Rate	66 Mbps (32 channel) 129 Mbps (64 channel) 254 Mbps (128 channel)
Data Per Point	Range, signal, reflectivity, near-infrared, channel, azimuth angle, timestamp
Timestamp Resolution	< 1 μ s
Data Latency	< 10 ms

IMU Output

Connection	UDP over gigabit Ethernet
Samples Per Second	100
Data Per Sample	3 axis gyro 3 axis accelerometer
Timestamp Resolution	< 1 μ s
Data Latency	< 10 ms
Additional Details	InvenSense ICM-20948

Control Interface

Connection	TCP and HTTP APIs
Time Synchronization Input sources:	<ul style="list-style-type: none"> • IEEE1588 Precision Time Protocol (PTP); Accuracy: <1 ms error • gPTP; Accuracy: <1 ms error • NMEA \$GPRMC UART message support • External PPS; Accuracy: <1 ms error • Internal 10 ppm drift clock; Accuracy: <20 ppm error
Time Synchronization Output sources:	Configurable 1 - 60 Hz output pulse

Lidar Operating Modes	Hardware-triggered angle firing (guaranteed fixed resolution per rotation): <ul style="list-style-type: none"> • x 512 @ 10 Hz or 20 Hz • x 1024 @ 10 Hz or 20 Hz • x 2048 @ 10 Hz
Additional Programmability	Multi-sensor Phase Lock, Azimuth Masking, Low-power Standby Mode, Queryable intrinsic calibration information: <ul style="list-style-type: none"> • Beam angles • IMU pose correction matrix

Mechanical/Electrical

Power Consumption	14 - 20 W (22 W peak at startup, 28 W peak if operating below -40 °C)
Operating Voltage	22 - 26 V, 24 V nominal
Connector	Proprietary pluggable connector (Power + data + DIO)
Dimensions	Diameter: 85 mm (3.34 in) Height: <ul style="list-style-type: none"> • without cap: 58.35 mm (2.3 in) • with thermal cap: 73.5 mm (2.9 in)
Weight	Without cap: 377 g (13.3 oz) With radial cap: 447 g (15.8 oz)
Mounting	Bottom: 4x M3 screws, 2x locating 2 mm pin holes Top: 4x M3 screws, 4x locating 2 mm pin holes, 1x M6 screw

Operational

Operating Temperature	-40 °C to +60 °C (with mount) Between +53 °C and +60 °C, sensor automatically reduces range (max 20% range reduction)
Storage Temperature	-40 °C to +75 °C
Ingress Protection	IP68 (1m submersion for 1 hour, with I/O cable attached) IP69K (with I/O cable attached)
Shock	IEC 60068-2-27 (Amplitude: 100 g, Shape: 11 ms half-sine, 3 shocks x 6 directions)
Vibration	IEC 60068-2-64 (Amplitude: 3 G-rms, Shape: 10 - 1000 Hz, Mounting: sprung masses, 3 axes w/ 8 hr duration each)
Compliance	For US Laser Safety: • IEC/EN 60825-1:2014 Class 1 eye safe

	<ul style="list-style-type: none"> FDA US 21CFR1040 Notice 50 Class 1
	Product Safety: <ul style="list-style-type: none"> UL 62368-1 CSA 22.2 No. 62368-1-19 EMC: FCC 47CFR Part 15, Subpart B, Class A
Compliance	For EU Laser Safety: <ul style="list-style-type: none"> IEC/EN 60825-1:2014 Class 1 eye safe Product Safety: <ul style="list-style-type: none"> EN/IEC 62368-1 EMC: <ul style="list-style-type: none"> EN 55032:2012/AC 2013; CISPR 32:2015 EN 55024:2010; CISPR 24:2010 EN 61000-3-2:2014 EN 61000-3-3:2013

Software

Sample Drivers	ROS, C++
-----------------------	----------

