

SF30/C


The SF30/C laser rangefinder provides real time, accurate altitude (AGL) measurements for UAVs.



Key features

Weight:	29.42 g 1.04 oz	Update rate:	39 ... 20 000 readings per second
Size:	30 mm x 56 mm x 50 mm 1.2 in x 2.2 in x 2 in	IP rating:	Unit is IP40, front face is IP65
Range:	0.2 ... 100 m 0.6 ... 328 ft	Integrates with:	Arduino, Raspberry Pi and LightWare Studio
Beam type:	Single beam	Interfaces:	USB, Serial and I2C (3.3 V TTL, 5 V tolerant)

Applications

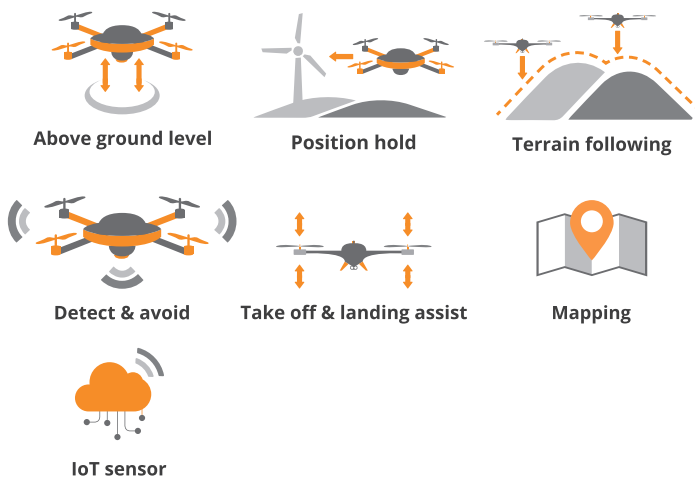

What is in the box?



Optional accessories



Aluminum stand kit